

# TAB CHAIR



The **Tab Chair** is a humanistic response to the various ways we sit in a chair, created with elegance, creativity and discipline by Alain Berteau. The back has a flex which makes comfortable and ergonomic seating. The front of the chair is padded and upholstered; the back is a plywood shell in lacquer or wood veneer finish. The base is available in cantilever, sledge and height adjustable 5-star with castors. The sledge base chair is stackable and comes with interlocking connectors.





# Alain Berteau

Award winning designer and architect **Alain Berteau** also works in education, teaching furniture design at the Henry van de Velde -founded La Cambre design school. Berteau works on both residential and industrial projects. His creations are simple, intense and constantly challenging the norm. His studio practice puts as much emphasis on the environment and surroundings of the projects as with the design of the product itself. In 2006 Berteau won his first Designer of the Year award at the renowned international design exhibition, Courtray Design Biennale Interieur.

## Content

Specifications	4
Types	5
Dimensions	6
Materials	7
Upholstery Fabrics	8
Upholstery Leather	13



## Specifications

or wooden floors we offer felt glides, but advise to use a 5-star base with soft castors to avoid any damage to the wood.

All veneer is FSC certified.

All the wood used is FSC certified.

Steel is certified with ISO 9001:2015, ISO 14001:2015

Foam is certified, CRIB5

Powder coating is a lacquer technique that is less harmful to the environment in contrast to wet coating. (no solvents and little production waste).

Water-based lacquers that are used are up to most strict european norms.

# Types

---

Tab desk chair



Tab visitor's chair on sledge base



Tab visitor's chair on cantilever



Tab bar stool




# Dimensions

---

## Tab desk chair

- w 440 mm
- d 630 mm
- h 720-845 mm

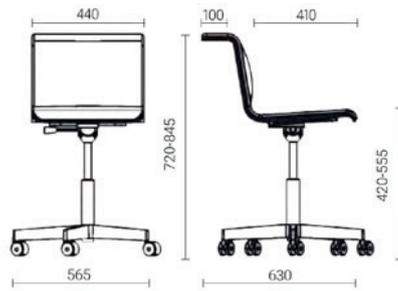


## Tab visitor's chair on sledge base

- w 440 mm
- d 630 mm
- h 770 mm




## Tab visitor's chair on cantilever

- w 440 mm
- d 630 mm
- h 765 mm

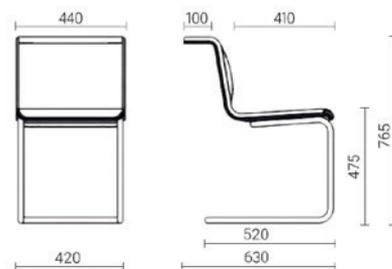

## Tab bar stool

- w 440 mm
- d 630 mm
- h 1000 mm

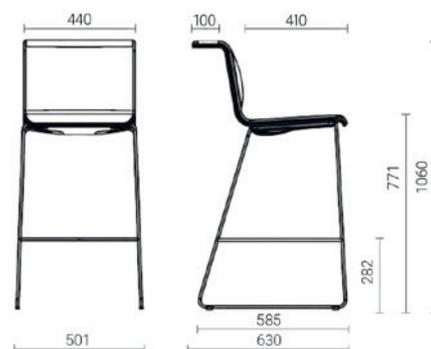

# Materials

---

## Shell




Lilly White Lacquered



Light Grey Lacquered



Dark Grey Lacquered

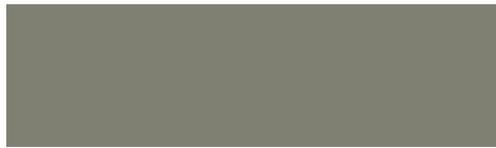

Grey-green Lacquered



Coffee Bean Lacquered



Red Lacquered



Walnut Veneer



Oak Veneer

---

## Castors

Hard castors for carpet

Soft castors for hard floors and wooden floors

---


## Glides

Felt glides for wooden floors

Plastic glides for hard floors and carpet

### Ronny

Category: 1 | RO503

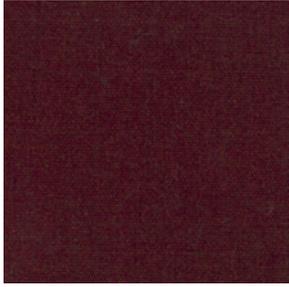

**Composition** 49% wool, 34% cotton, 17% nylon

**Weight** 500g/lin.m

**Abrasion** 50.000 Martindale rubs, ISO 12945

**Pilling** 4, ISO 12945.


**Fastness to light** 5, ISO 105-B02

**Flammability** BS 5852 Cigarette test, EN 1021-1 Cigarette test, EN 1021-2 Match test

---

### Main Line Flax

Category: 1 | MLF02

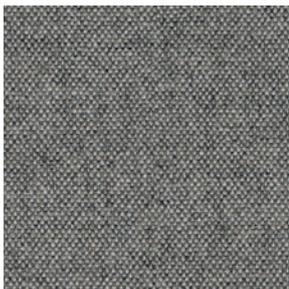

**Composition** 70% Pure New Wool, 30% Flax

**Weight** 13 oz/sq yd

**Abrasion**  $\geq$ 100,000 double rubs, ASTM D4157 Wyzenbeek method

**Fastness to light** 4, AATCC-16 (40 hours)

**Flammability** California Technical Bulletin 117 - 2013, NFPA 260 + UFAC Class 1, BS 7176 Low Hazard, ASTM E84 Class 1 or A (Adhered)

---

### Duffy

Category: 1 | DU028



---

**Extrema AU**

Category: 1 | EX2250

**Composition:** 63% Polyurethane - 29% COT 8% Polyester**Weight:** 480 g/m<sup>2</sup>**Abrasion:** 150.000 Martindale rubs, ISO 12947-2**Fastness to light:** 5/6, IISO 105-B02**Flammability**

UNI 9175 classe 1 IM, EN 1021 part. 1-2, BS 5852 crib 5, BS 5852 Source 1, IMO 2010 FTP CODE | TB 117: 2013

---

**Blazer**

Category: 2 | CUZ2Q

**Composition** 100% Pure New Wool**Weight** 13 1/2 oz/sq yd**Abrasion** ≥75,000 double rubs, ASTM D4157 Wyzenbeek method**Fastness to light** 4, AATCC-16 (40 hours)**Flammability** California Technical Bulletin 117 - 2013, NFPA 260 + UFAC Class 1, BS 7176 Low Hazard, ASTM E84 Class 1 or A (Adhered)

---

**Credo**

Category: 2 | Lampion

**Composition** 95% New Wool, 5% PA (polyamide)**Weight** 610 g/m<sup>2</sup> - 870 g/lfm**Abrasion** 100.000 rubs, ISO 12947-2**Pilling** ≥ 4-5, ISO 12945-2**Fastness to light** ≥ 5, ISO 105-B02**Flammability** FAR 25.853 (12 sec. vertical), CAL TB 117 - 2013, DIN 4102-1 B2, DIN EN 13501-1, DIN EN 1021 -1 und -2, BS 5852:1979 (part1), BS 5852:2006 (part2) Crib5, BKZ: 5.3 SN 198898, UNI 9175 (1 IM), NF P92 503-507 M2, IMO: 2014/90/EU Marine Equipment Directive



**Composition** 5% New wool (worsted), 45% Recycled wool, 10% Nylon

**Weight** 540 g/lin.m


**Sustainability** Complies with EU ecolabel "The Flower"

**Abrasion** 100.000 Martindale

**Pilling** 4

**Fastness to light** 7

**Flammability** BS 5852 Crib 5 with treatment, BS 5852 ignition source 3, BS 5852 part 1, EN 1021-1/2, NF D 60 013, UNI 9175 1IM, US Cal. Bull. 117-2013, ÖNORM B1/ Q1, AS/NZS 3837 Class 2

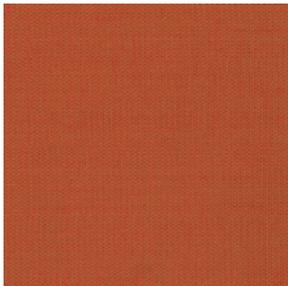

**Composition** 95% Wool, 5% PA


**Weight** 440 g/m<sup>2</sup> - 660 g/lfm

**Abrasion** 50.000 rubs, ISO 12947-2

**Pilling** ≥ 4-5, ISO 12945-2

**Fastness to light** ≥ 5, ISO 105-B02

**Flammability** FAR 25.853 (12 Sek. vertikal), CAL TB 117 - 2013, DIN 4102-1 B2, DIN EN 13501-1, DIN EN 1021 -1 and -2, BS 5852:1979 (part1), BS 5852:2006 (part2) Crib5, BKZ: 5.3 SN 198898, UNI 9175 (1 IM), IMO: 2014/90/EU Marine Equipment Directive, Train: EN 45545-2 R21 ISO 5660-1 (HL3)

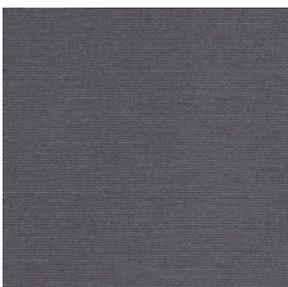

**Composition** 100% Trevira CS

**Weight** 560 g/lin.m

**Sustainability** Fluorocarbon-free water repellent finish

**Abrasion** 50.000 Martindale

**Pilling** 4-5

**Fastness to light** 7

**Flammability** BS 5852 Crib 5, BS 5852 ignition source 3, DIN 4102 B1, EN 1021-1/2, NF D 60



**Composition** 90% New wool (worsted), 10% Nylon

**Weight** 480 g/lin.m

**Abrasion** 100.000 Martindale

**Pilling** 4

**Fastness to light** 6

**Flammability** AS/NZS 1530.3, BS 5852 part 1, EN 1021-1/2, IMO FTP Code 2010 Part 8, NF D 60 013, NFPA 260, SN 198 898 5.3 with treatment, UNI 9175 1IM, US Cal. Bull. 117-2013, ÖNORM B1/ Q1, BS 5852 ignition source 3, BS 5852 Crib 5 with treatment



**Composition** 90% New wool (worsted), 10% Nylon

**Weight** 825 g/lin.m

**Sustainability** Complies with EU ecolabel "The Flower"

**Abrasion** 100.000 Martindale

**Pilling** 3-4

**Fastness to light** 6

**Flammability** AS/NZS 3837, class 2, BS 5852 part 1, EN 1021-1/2, IMO FTP Code 2010 Part 8, NF D 60 013, SN 198 898 5.3 with treatment, UNI 9175 1IM, US Cal. Bull. 117-2013, ÖNORM B1/ Q1, BS 5852 Crib 5 with treatment, NFPA 260, AS/NZS 1530.3



**Composition** 70% New wool, 30% Viscose

**Weight** 795 g/lin.m


**Sustainability** Complies with EU ecolabel "The Flower"

**Abrasion** 100.000 Martindale

**Pilling** 3-4

**Fastness to light** 7

**Flammability** AS/NZS 1530.3, BS 5852 Crib 5, BS 5852 part 1, EN 1021-1/2, IMO FTP Code 2010 Part 8, NF D 60 013, NFPA 260, SN 198 898 5.3 with treatment, UNI 9175 1IM, US Cal. Bull. 117-2013, ÖNORM B1/ Q1, BS 5852 ignition source 3

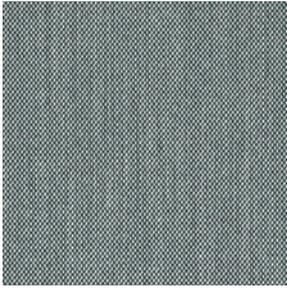

**Composition** 90% New wool (worsted), 10% Nylon

**Weight** 770 g/lin.m

**Sustainability** Complies with EU ecolabel "The Flower"

**Abrasion** 100.000 Martindale

**Pilling** 4

**Fastness to light** 5

**Flammability** AS/NZS 3837, class 2, BS 5852 part 1, EN 1021-1/2, IMO FTP Code 2010 Part 8, NF D 60 013, NFPA 260, SN 198 898 5.3 with treatment, UNI 9175 11M, US Cal. Bull. 117-2013, ÖNORM B1/ Q1, BS 5852 Crib 5 with treatment, AS/NZS 1530.3, BS 5852 ignition source 3

## Upholstery Leather



Pearl



Warm Grey



Sienna



Mustard



Dark Brown



Black