
Monica Conference

Bulo

in collab with Gensler



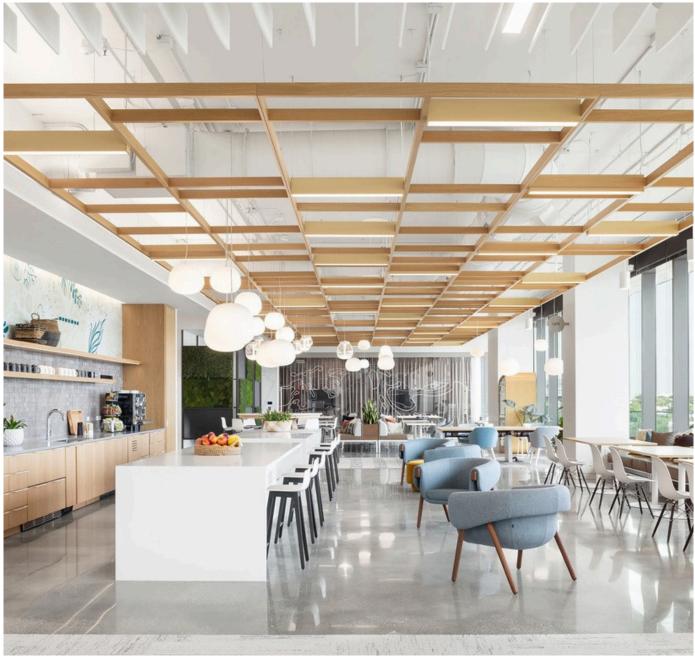

Courtesy Gensler Miami

GENSLER

Gensler is a global architecture, design and planning firm with 50 locations and more than 6000 professionals networkingacross the world. Founded in 1965, the firm serves more than 3500 active clients in virtually every industry. Gensler's product development team has selectively worked with manufacturers to design hundreds of successful products. From project brief to prototyping to finalizing the design, we continuously observed their informed criteria and process. Monica meets Gensler's high standard for form, function, quality and sustainable materiality. In 2019 Bulo and Gensler collaborated to design this lounge collection. Since it's first year of production, Monica has become a global favorite design.



MONICA

Monica is a soft lounge chair with a solid wooden base and a 'draped' upholstered soft shell resting on it. The duality of the chair is based on contrasts between hard and soft, static and fluid. It's almost as if she is tempting gravity with a soft skin that is hanging over a rigid wooden skeleton. Wood is in Bulo's DNA, so it was an obvious choice to leave the beautifully shaped details visible. Monica is a contemporary piece with vintage look that's well adapted to the technicality and comfort of today. Monica is an ideal choice for contract projects in workplace, hospitality and high-end retail. Monica has also developed a strong identity in residential interiors around the world.



The shell is made of a metal frame; molded in a HR High Density Flexible PU foam. Material: 52 - 66% Polyolblend & 48 - 34% Isocyanate MDI. The Comfort HR Cold cure foam contains no CFK's. Very high comfort standards are being met with this formula while the molded parts are "crushless" due to the composition of the isocyanate. The foam passes the California technical Bulletin 117 test; Test criteria: no open flaming smouldering ≤ 45 minutes, vertical char ≤ 38 mm

5-star base on castors



Upholstered in a soft, textured fabric, its sculpted form offers both style and support, ideal for long meeting sessions. The sturdy 5-star base is crafted from durable steel and fitted with smooth-rolling castors for easy mobility. Height adjustable for customized seating, Monica Conference brings ergonomic functionality to any meeting space.

Swivel base available in black and in polished aluminium.

On 5 universal castors.

Monica Conference on 5-star base


w 720 mm / 28.3"

d 600 mm / 23.6"

h 750 - 880 mm / 29.5" - 34.6"

seat height

490 - 620 mm / 19.3" - 24.4"

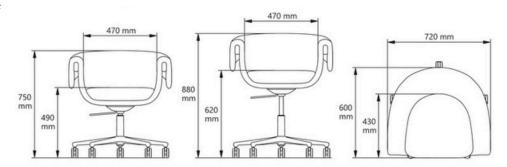



The legs are made from FSC certified solid wood; treated with water-based lacquers that meet the most strict European standards. The legs are fixed with a double bolt connection to a metal frame that curves under the wing of the chair. This method guarantees the highest level of strength and stability.

Legs available in natural ash, black lacquered ash and ash stained in walnut color. On universal glides.

Monica Conference on 4 solid wood legs


w 720 mm / 28.3"

d 600 mm / 23.6"

h 740 mm / 29.1"

seat height

480 mm / 18.9"

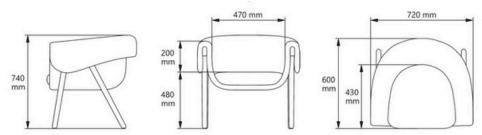

Materials

Aluminium star base



Black



Polished

Solid wood



Ash natural



Ash black lacquered



Ash stained in walnut color







www.bulo.com

Product Specification Sheet

Cico Category 1 | CI



By Bulo
Composition 100% Polypropylene Weight 1.063 g/lm Abrasion 30.000 rubs
Fastness to light 7/8 Flammability TB 177 CALIFORNIA, BS 5852 Cigarette, BS
Match - with treatment Pilling 4-5 on 5.000 rubs Sustainability OEKO-TEX
standard 100, GREENGUARD gold

All colorways available

Quest Category 1 | QE



Textile mill Camira

Composition 100% post-consumer recycled polyester including 75% SEAQUAL® YARN Weight 330g/m2 ±5% Abrasion Heavy duty / 10 year guarantee. Independently certified to ≥100,000 Martindale cycles Light resistance 4-6 (ISO 105 - B02)
Flammability EN 1021 - 1 (cigarette), EN 1021 - 2 (match), BS 7176 Low Hazard UNI 9175 Classe 1 IM, BS 476 Part 7 Class 1Y (Adhered), EN 13501-1 Adhered Class B, s1, d0, EN 13501-1 Un-adhered Class B, s1, d0, BS 5852 Ignition Source 5 with EnviroFlam5, BS 7176 Medium Hazard with EnviroFlam5, IMO FTP Code (Part 8) with EnviroFlam5

All colorways available

Camira Fabrics partnered with the SEAQUAL INITIATIVE to combat marine plastic pollution. SEAQUAL® YARN is woven entirely from post-consumer recycled plastic. Quest is a balanced hopsack weave enhanced by the discat-dyed SEAQUAL® YARN.

Lario Category 2 | LAR



By Bulo Composition 42% cotton, 32% acrylic, 26%. polyester Weight 980 g/lm Abrasion 45.000 rubs Pilling 4 on 5.000 rubs Flammability TB 117 CALIFORNIA, BS 5852 Cigarette With treatment: BS 5852, Match, CRIB5

All colorways available

Main Line Flax

Category 2 | MLF



Textile mill Camira fabrics
Composition70% PureNew Wool, 30% Flax
Weight 13 oz/sq yd Abrasion ≥100,000 double rubs, ASTM D4157 Wyzenbeek
method Fastness to light 4, AATCC-16 (40 hours) Flammability California
Technical Bulletin 117 - 2013, NFPA 260 + UFAC Class 1, BS 7176 Low Hazard,
ASTM E84 Class 1 or A (Adhered)

All colorways available

Perseide

Category 2 | PER



All colorways available

By Bulo

Composition 35% virgin wool, 7% cotton, 35% acrylic, 23%. polyester Weight 587 g/lm Sustainability Complies with EU ecolabel "The Flower" Abrasion 40.000 rubs Pilling 3-4 on 5.000 rubs Flammability TB 117 CALIFORNIA, BS 5852 Cigarette With treatment: BS 5852 Match, 3-4 on 5.000 rubs CRIB5

Tresigallo

Category 2 | TRE



All colorways available

By Bulo Composition PC 22% WV 22% PL 22% VI 14% CO

13% LI 7%

Bouclé/loop pile fabric

Weight 834 g/lm

Abrasion 30.000 Martindale ISO 12947-2

Pilling 4 5000 rubs ISO 12945-2

Fastness to light 5/6 ISO 105-B02

Flammability BS Cigarette - TB 117 California

Blazer Category 3 | BL



Textile mill Camira fabrics
Composition 100% Pure

Composition 100% Pure New Wool Weight 13 1/2 oz/sq yd Abrasion ≥75,000 double rubs, ASTM D4157 Wyzenbeek method Fastness to light 4, AATCC-16 (40 hours) Flammability California Technical Bulletin 117 - 2013, NFPA 260 + UFAC Class 1, BS 7176 Low Hazard, ASTM E84 Class 1 or A (Adhered)

All colorways available

Meld Category 3 | ME



Textile mill Maharam

Textile mill Maharam

Composition 68% Post-Consumer Recycled Polyester, 32% Polyester Finish Stain repellent Weight 500 g/lm Abrasion ASTM D4157, 100,000 double rubs Wyzenbeek Fastness to light AATCC 16E, 40+ hours Flammability AS/NZS 1530.3, AS/NZS 3837 Unadhered, ASTM E 84 Unadhered, CAL 117-2013, CAN ULC S102 Unadhered Environmental Greenguard Gold Certified, Greenguard Certified, GRS Certified Content, REACH Compliant, Contains Recycled Content, FR Free

All colorways available

Merit Category 3 | MR



All colorways available

Composition 76% Post-Consumer Recycled Polyester, 24% Polyester Weight 17.1 oz/ly (500 gr/lm) Abrasion ASTM D4157, 100,000 double rubs Wyzenbeek Fastness to light AATCC 16E, 40+ hours Flammability AS/NZS 1530.3, AS/NZS 3837 Unadhered, ASTM E 84 Unadhered BS 476 Unadhered*, BS 5852 Crib 5*, CAL 117-2013, CAN ULC S102 Unadhered EN 1021-1*, EN 1021-2*, EN 13501 Unadhered*, GB/T 17591*, ISO 5660 Unadhered NFPA 260, SN 198 898*, *passes with additional treatment Environmental, Greenguard Gold Certified, GRS Certified Content,

REACH Compliant, Contains Recycled Content, FR Free

Re-wool 2

Category 3 | RW



All colorways available

Textile mill Kvadrat

Composition 5%New wool (worsted), 45% Recycled wool, 10% Nylon Weight 540 g/lin.m Sustainability Complies with EU ecolabel "The Flower" Abrasion 100.000 Martindale Pilling 4 Fastness to light 7 Flammability BS 5852 Crib 5 with treatment, BS 5852 ignition source 3, BS 5852 part 1, EN 1021-1/2, NF D 60 013, UNI 9175 1IM, US Cal. Bull. 117-2013, ÖNORM B1/Q1, AS/ NZS 3837 Class 2

Arco

Category 4 | AR




All colorways available

Textile mill Rohi

Composition 95% virgin wool 5% polyamide Weight 700 g/m2 - 980 g/lm Abrasion 70.000 rubs ISO 12947-2 Fastness to light ≥ 5 ISO 105-B02 (yarn dyed) Flammability wool is naturally flame retardant. Rohi wool fabrics satisfy the following standards with no additional flame retardant finish: CAL TB 117 - 2013, DIN EN 1021-1/-2, BS 5852 part 1: 1979, UNI 9175 1 IM, IMO 2014/90/EU, Marine Equipment Directive (MED)

Cleo

Category 4 | CL



All colorways available

Textile mill Rohi

Composition 95% virgin wool 5% polyamide Weight 690 g/m2 - 970 g/lm Sustainability natural, renewable material, IWTO Guidelines for Wool Sheep Welfare, RAL DE-UZ 117 Att. 3b for "Blue Angel", without flame retardant AB 2998 (US export standard), REACH (EU export standard) Abrasion 70.000 rubs ISO 12947-2 Pilling ≥ 4-5 ISO 12945-2 Fastness to light ≥ 5 ISO 105-B02 (yarn dyed) Flammability wool is naturally flame retardant, rohi wool fabrics satisfy the following standards, with no additional flame retardant finish:, CAL TB 117 − 2013, DIN EN 1021- 1/ -2, BS 5852 part 1: 1979, UNI 9175 1 IM, ÖNORM B1/Q1, IMO 2014/90/EU Marine Equipment Directive (MED)NZS 3837 Class 2. With additional flame retardant finish: BS 5852: 2006 Crib5, DIN 4102-1 B2, DIN EN 13501-1 E, FAR 25.853 12 sec. vertical, BKZ 5.3 SN 198898

Credo Category 4 | CR



Textile mill Rohi

Composition 95% New Wool, 5% PA (polyamide) Weight 610 g/m² - 870 g/lfm Abrasion 100.000 rubs, ISO 12947-2 Pilling \geq 4-5 , ISO 12945-2 Fastness to light \geq 5, ISO 105-B02 Flammability FAR 25.853 (12 sec. vertical), CAL TB 117 - 2013, DIN 4102-1 B2, DIN EN 13501-1, DIN EN 1021 -1 und -2, BS 5852:1979 (part1), BS 5852:2006 (part2) Crib5, BKZ: 5.3 SN 198898, UNI 9175 (1 IM), NF P92 503-507 M2, IMO: 2014/90/EU Marine Equipment Directive

All colorways available

Encircle Category 4 | EN



Textile mill kvadrat

Composition 100% Trevira CS Weight 560 g/m2 (18.06 oz/sq ft) Sustainability Greenguard Gold, HPD, EPD Abrasion 80,000 Martindale Pilling 4 (ISO 1-5) Fastness to light 6 Flammability BS 5852 Crib 5 • AS/NZS 3837 class 1 • DIN 4102 B1 • IMO FTP Code 2010 Part 8 • NF P 92 507 M1 • NFPA 701 • ÖNORM B1/Q1 • NF D 60 013 • SN 198 898 5.2 • EN 1021-1/2 • UNI 9175 1IM • US Cal. Bull. 117-2013 • ASTM E84 Class A Unadhered • BS 5867 part 2 type B • EN 13501-1, B-s1, d0 • CAN ULC S102 • CAN ULC S109

All colorways available

Shake Category 4 | SH



Textile mill Rohi

Composition 95% WV 5% PA Weight 440 g/m² - 660 g/lm Abrasion \geq 70.000 rubs ISO 12947-2 Pilling \geq 4-5 , ISO 12945-2 Fastness to light \geq 5, ISO 105-B02 (yarn dyed) Flammability CAL TB 117 - 2013, DIN EN 1021 -1 / -2, BS 5852:1979 (part1), UNI 9175 (1 IM), ÖNORM B1/Q1, IMO 2014/90/EU Marine Equipment Directive.

All colorways available

Topia Category 4 | TP



Textile mill Rohi

Composition 95% Wool, 5% PA Weight 440 g/m² - 660 g/lfm Abrasion 50.000 rubs, ISO 12947-2 Pilling ≥ 4-5, ISO 12945-2 Fastness to light ≥ 5, ISO 105-B02 Flammability FAR 25.853 (12 Sek. vertikal), CAL TB 117 - 2013, DIN 4102-1 B2, DIN EN 13501-1, DIN EN 1021 -1 and -2, BS 5852:1979 (part1), BS 5852:2006 (part2) Crib5, BKZ: 5.3 SN 198898, UNI 9175 (1 IM), IMO: 2014/90/EU Marine Equipment Directive, Train: EN 45545-2 R21 ISO 5660-1 (HL3)

All colorways available

Hallingdal 65 Category 5 | HA



Textile mill Kvadrat Composition 70%New wool, 30% Viscose

Weight 795 g/lin.m Sustainability Complies with EU ecolabel "The Flower" Abrasion 100.000 Martindale Pilling 3-4 Fastness to light 7 Flammability AS/NZS 1530.3, BS 5852 Crib 5, BS 5852 part 1, EN 1021-1/2, IMO FTP Code 2010 Part 8, NF D 60 013, NFPA 260, SN 198 898 5.3 with treatment, UNI 9175 1IM, US Cal. Bull. 117-2013, ÖNORM B1/ Q1, BS 5852 ignition source 3

All colorways available

Steelcut 3 Category 5 | CT



Textile mill Kvadrat Composition 90%New wool (worsted), 10% Nylon

Weight 825 g/lin.m Sustainability Complies with EU ecolabel "The Flower" Abrasion 100.000 Martindale Pilling 3-4 Fastness to light 6 Flammability AS/NZS 3837, class 2, BS 5852 part 1, EN 1021-1/2, IMO FTP Code 2010 Part 8, NF D 60 013, SN 198 898 5.3 with treatment, UNI 9175 1IM, US Cal. Bull. 117-2013, ÖNORM B1/Q1, BS 5852 Crib 5 with treatment, NFPA 260, AS/NZS 1530.3

All colorways available

Category 5 | VI

Upholstery fabrics

Steelcut Trio 3 Category 5 | TR



All colorways available

Textile mill Kvadrat
Composition 90%New wool (worsted), 10% Nylon
Weight 770 a diagram Sustainahilian Complian mill El

Weight 770 g/lin.m Sustainability Complies with EU ecolabel "The Flower" Abrasion 100.000 Martindale Pilling 4 Fastness to light 5 Flammability AS/NZS 3837, class 2, BS 5852 part 1, EN 1021-1/2, IMO FTP Code 2010 Part 8, NF D 60 013, NFPA 260, SN 198 898 5.3 with treatment, UNI 9175 1IM, US Cal. Bull. 117-2013, ÖNORM B1/ Q1, BS 5852 Crib 5 with treatmen, AS/ NZS 1530.3, BS 5852 ignition source 3

Vidar 4



All colorways available

Textile mill Kvadrat

Composition 94% new wool 6% nylon Weight 770 g/m2 (24.84 oz/sq ft)
Sustainability Complies with EU ecolabel "The Flower" Abrasion 100,000
Martindale Pilling 4 (ISO 1-5) Fastness to light 7 Flammability BS 5852 crib 5 with treatment • BS 5852 part 1 • IMO FTP Code 2010 Part 8 • NF D 60 013 • NFPA 260 • UNI 9175 1IM • US Cal. Bull. 117-2013 • EN 1021-1/2 • AS/NZS 3837 class 2 • GB 50222 B1 with treatment (Chinese) • SN 198 898 5.3 with treatment • IMO FTP Code 2010 Part 7 with treatment • NFPA 701 with treatment

Upholstery leather



Origin European bullhides Thickness 1.0/1.2 mm Surface Pigmented nappa leather

Flammability BS 5852 PART 1 (ignition source 0 and 1) EN 1021-1 and 1021-2 CAL TB 117:2013

Leather is a natural material with natural variation in color and surface structure. No two are alike. A variety of markings like healed scars and abrasions may be visible and are not considered defects but are characteristics of genuine leather. On inquiry and at a surcharge, other leather colors than our standard colors may be available.

COM / COL

Customer's own material/leather Customers can supply their own fabric or own leather if preceded by consultation with Bulo or your Bulo partner. Bulo reserves the right to reject the COM/COL we find unsuitable. Warranty conditions on COM/COL available on request.

Fabric requirement for 1 Monica Conference chair:

- fabric width 140 cm / 55": 2 lm / 2.2 yrd
- fabric width 130 cm / less than 55": 2,2 lm / 2.4 yrd

Leather requirement available on request, depending on type and quantity of chairs